


Baha Mar  
Nexus Sports Bar  
Providenciales T&C

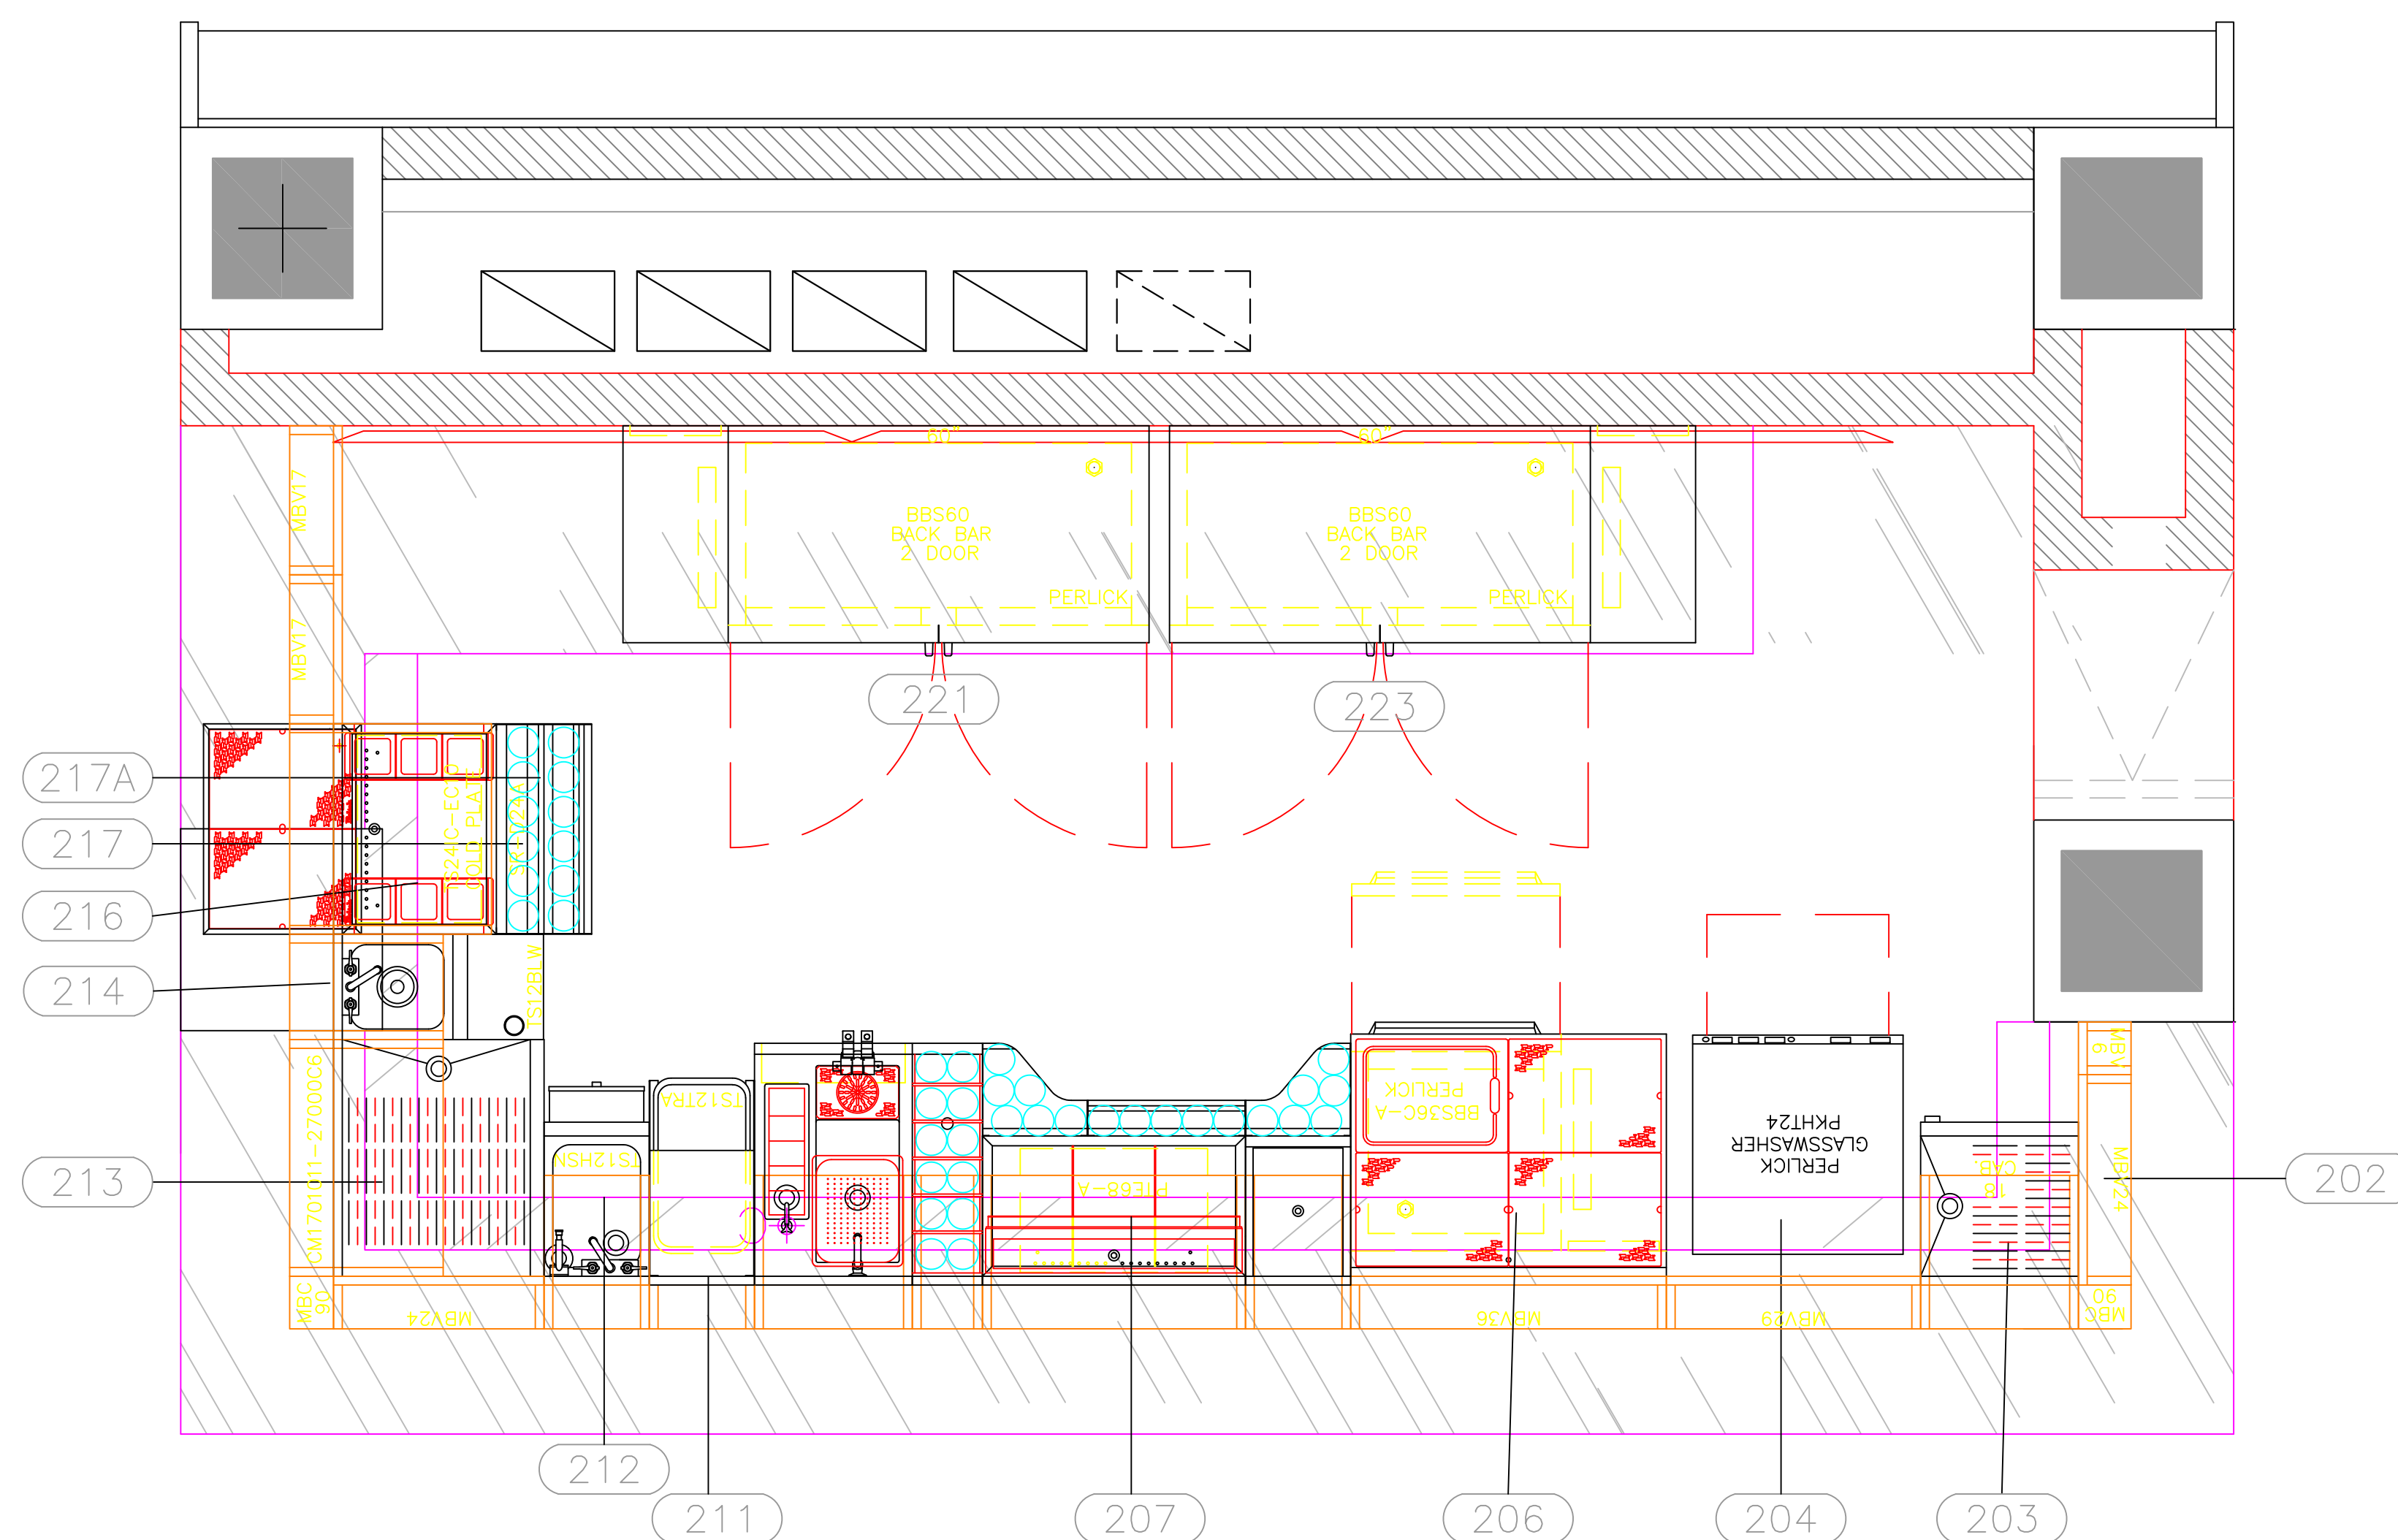

INTERNATIONAL INC.

2055 W 73rd Street, Miami, FL 33016  
Ph: (305)826-8696 Fax: (305)826-9131

EQUIPMENT SCHEDULE

Item No	Qty	Model Number	Manufacturer	Equipment Category	Equipment Remarks	Inair Drain Size (in)	Volts	Amps	Cold Water Size (in)	Hot Water Size (in)
202	55	MOD BAR UNITS	Perlick							
203	1	SC18	Perlick	Underbar Dry Storage		1.5				
204	1	PKHT24	Perlick	Glasswasher		1	208	33.0		0.5
206	1	BBS36C-A	Perlick	Underbar Cocktail Refrigeration		1	120	3.2		
207	1	PTE68-A	Perlick	Underbar Cocktail Station		0.5			0.5	0.5
						0.5			0.5	
						1.5			0.5	
						1.5				
211	1	TS12TRA	Perlick	Underbar Dry Waste						
212	1	TS12HSN	Perlick	Underbar Handsink		1.5			0.375	0.375
213	1	CM1701011-27000C6	Perlick	Underbar Fillers & Drainboards						
214	1	TS12BLW	Perlick	Underbar Blender Station		1.5			0.375	0.375
216	1	RDP18X24	Perlick	Drop-In, Drainers						
217	1	TS24C-EC10	Perlick	Underbar Ice Chest	BW6-24, CC4	0.5				
217A	1	SR-D24A	Perlick	Underbar Speed Rail						
221	1	BBS60*L	Perlick	Back Bar Equipment			120	5.5		
223	1	BBS60*R	Perlick	Back Bar Equipment			120	5.5		

EQUIPMENT LAYOUT

All Dimensions to be verified on the job site.  
Actual locations for floor drains, and any ventilating equipment to be determined by Engineer.  
Mechanical, Plumbing & Electrical to be checked and verified by Customers MEP Engineer.  
Remote Condensing Units to be located by Architect.  
Exhaust & Supply fans to be located by Architect.

No.	Revision/Issue	Date
1	Preliminary Layout	7-13-18
2		
3		
4		

Date  
**Jul 13, 2018**  
Drawn By  
**Dayne Gauntlett**  
Scale  
**1/2" = 1'0"**

Sheet  
**NSB-1**